



TÜV SÜD certified quality


# LAMILUX Woven Roving

INNOVATIVE FIBREGLASS SOLUTIONS

## PRODUCT DESCRIPTION

The LAMILUX Woven Roving product family comprises glass-fibre-reinforced polyester laminates with a balanced glass content. The surface can be sealed with a gelcoat layer, if required, for even better resistance to ultra-violet light and weathering and a less prominent fabric structure. The fabric reinforcement increases the mechanical strength and results in low linear expansion coefficients.

## VERSIONS

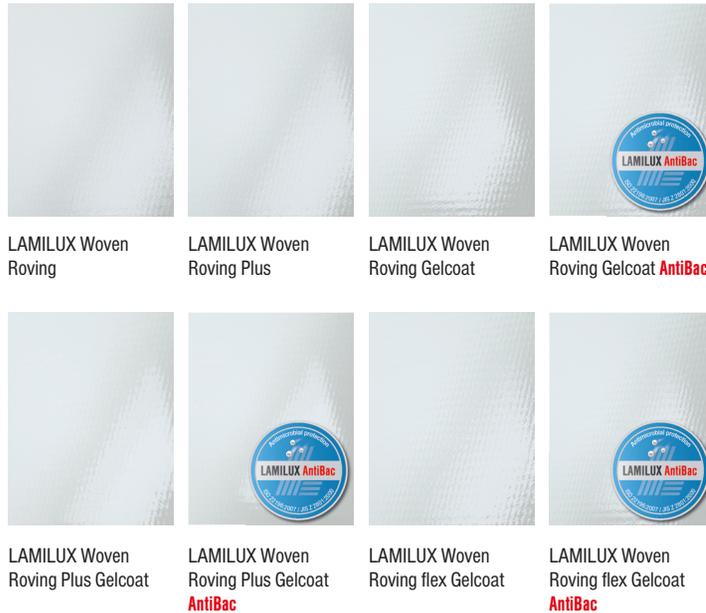

## LAMILUX WOVEN ROVING IS AVAILABLE

- in thicknesses between 0.8 and 5.0 mm
- in widths up to 3.2 m
- in sheets or coils
- in a range of colours: RAL, NCS scale and customer-specific colours
- with a matt surface
- with gelcoat surface for maximum resistance to UV rays and weathering
- gelcoat surface also available with antibacterial effect
- with flexible resin system for curved structures
- with improved surface for less pronounced fibre imprint (plus)
- in other thicknesses, dimensions and colours, on request
- with different treatments on the back surface (smooth, corona, sanded or soft sanded), on request

## SPECIFIC PRODUCT ADVANTAGES

- high mechanical strength
- lower coefficient of longitudinal extension
- exceptionally resistant to UV rays and weathering
- consistently high quality thanks to the constantly monitored, continuous manufacturing process
- easy to clean

## SECTORS

- Caravan sector
- Commercial vehicle sector
- Bus sector
- Medical and hygiene sector



The information in this brochure is based on our current knowledge and experience. It is not a guarantee of technical characteristic features in the scope of specifications. Due to the wide range of usage parameters, users themselves are responsible for testing that the product is suitable for their required use. Changes and errors excepted.